




Camp Alexander Mack Solar Project

Designed by Wellspring Components
Solar Provider since 1995

The plan proposed

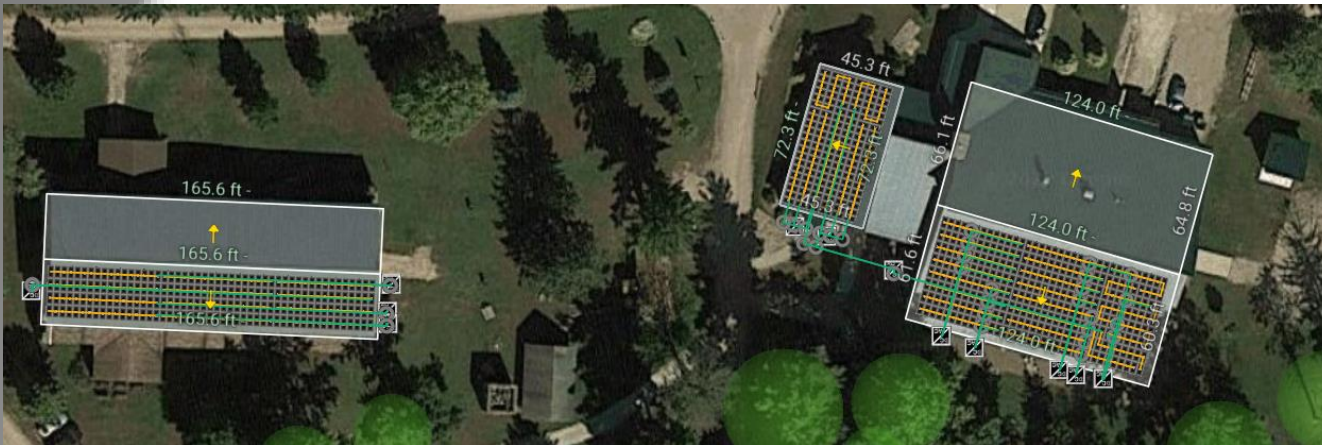

240.8kW DC (180KW AC) Single Phase
Estimated for 80% of current consumption

602 Modules - Dedicated Infrastructure
to handle solar outside of current infrastructure.

All System's will be brought to a central point.


The John Kline Building



South:
112.0kW
280 Modules

West Roof:
50.4kW
126 Modules






The Quinter Miller Auditorium

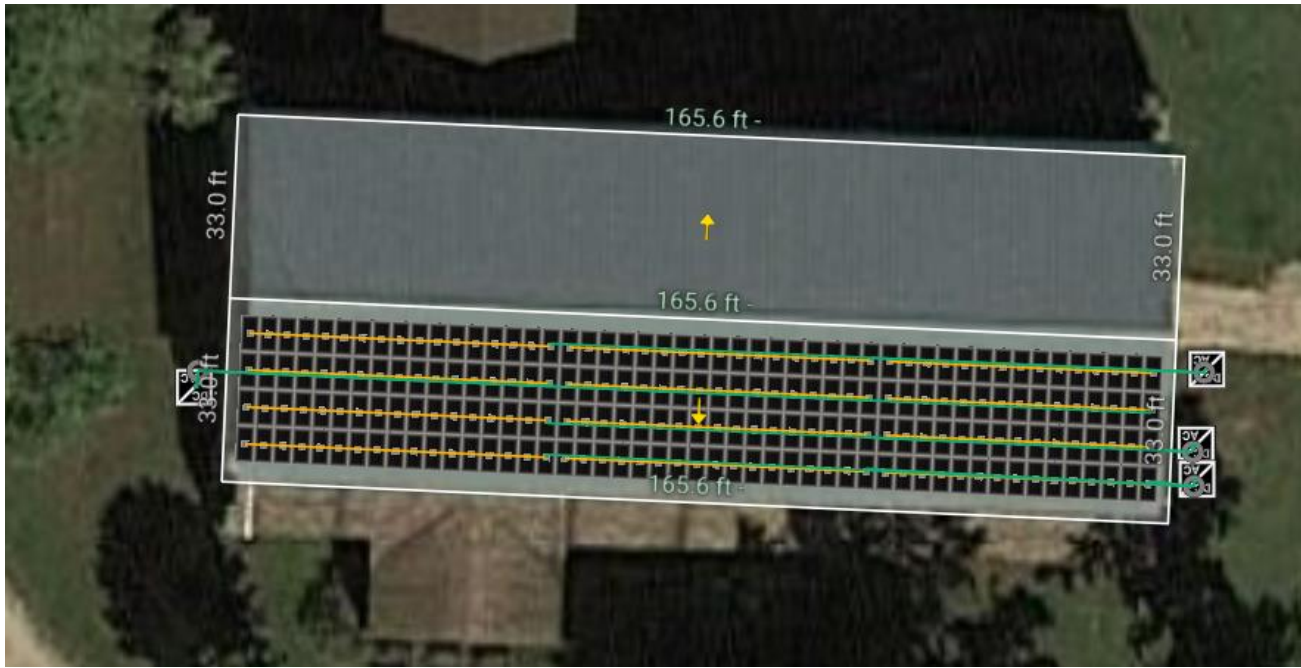

78.4 kW
196 Modules

Estimated Production

Year 1 Production:
258,971kWh
80% Energy Savings

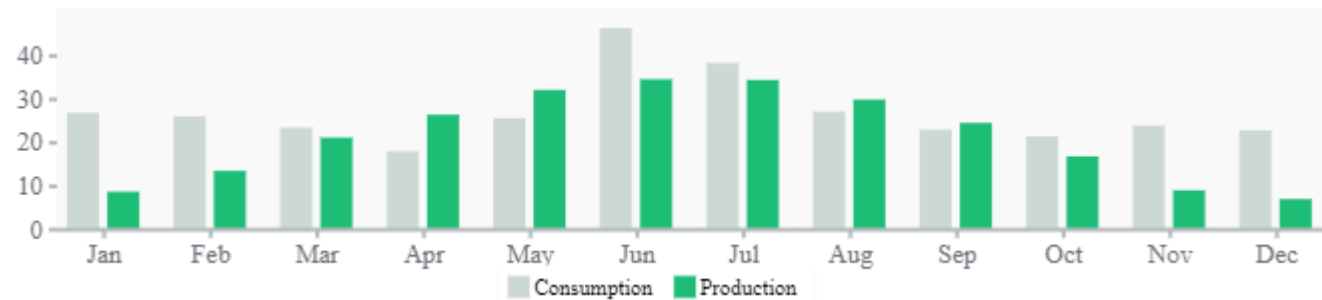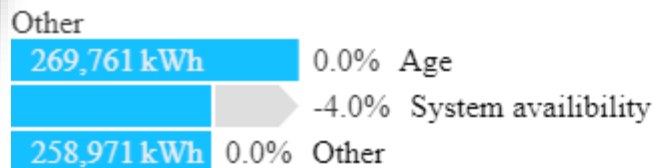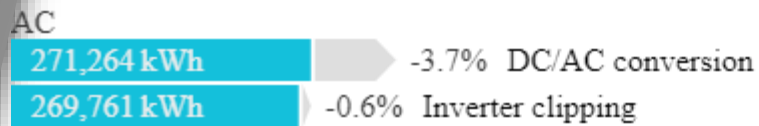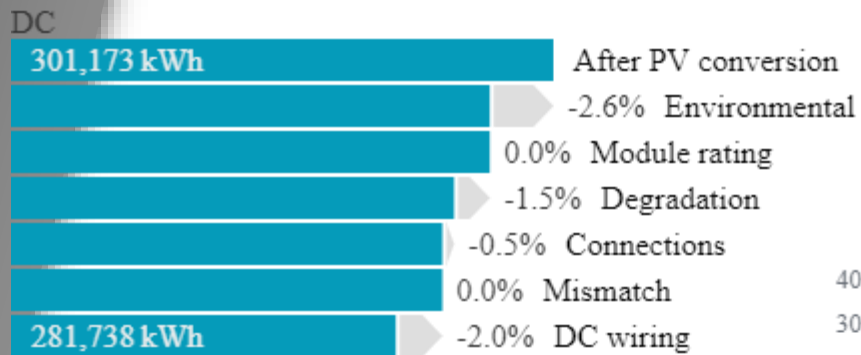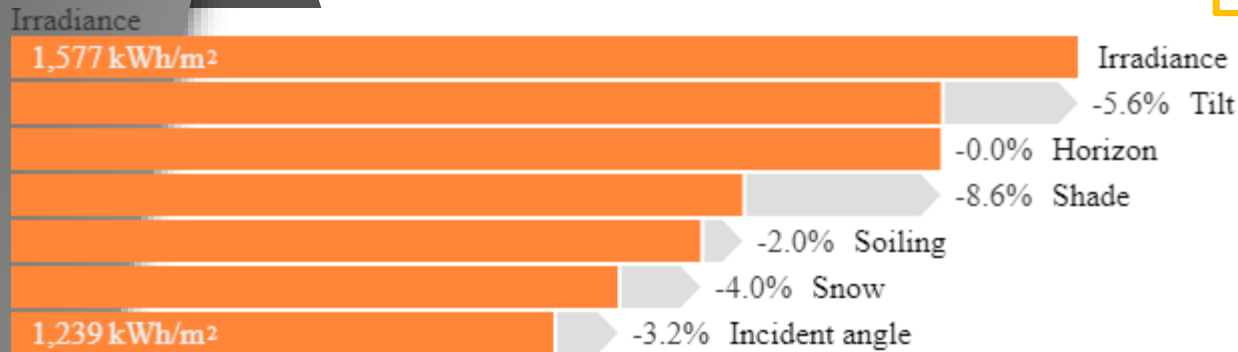

Project Warranty

- Wellspring Offers a 5-Year Workmanship Warranty.
- 1 Year Mechanical, Electrical, and a Performance Inspection & Evaluation.
- 25-Year Performance Warranty on Trina Solar Modules.
- Wellspring will warranty the Inverters for a duration of 25 years.
- Tigo Power Optimizers have a 25-Year Warranty.